

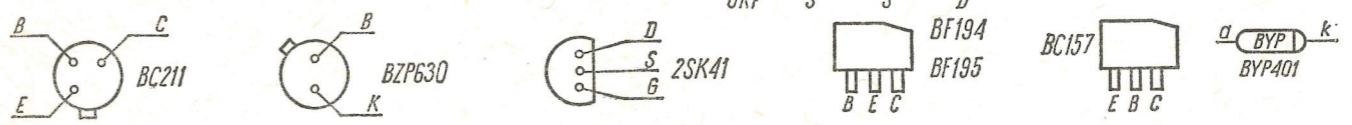


Rys. 28.35. Schemat ideowy samochodowego odbiornika radiowego „Traper” SMP-401

Zakres częstotł. stroj.	Częstotł. zestroj.
D - 145 ÷ 290 kHz	160; 280 kHz
S - 520 ÷ 950 kHz	560; 900 kHz
S' - 900 ÷ 1620 kHz	950; 1500 kHz
U - 65 ÷ 73,5 MHz	65; 73,5 MHz
U' - 87 ÷ 104,5 MHz	87; 104,5 MHz

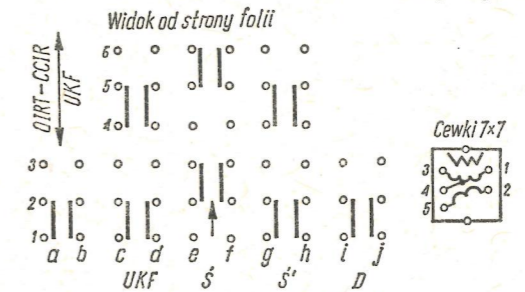

Uwaga: